

Soft and environmentally friendly solutions made of recycled rubber



ErgoFloor PU Rubber Tiles:

- Fall and shock reducing, anti-fatigue, non-skid and ergonomic.
- Can be delivered in many decorative shapes and colours in thicknesses from 15 to 45 mm
- Can be delivered with integrated drainage channels for the drainage of surface water.
- Can be installed directly on gravel, asphalt, concrete, roofing felt, existing concrete tiles etc.
- Resistant to extreme loads as e.g. from horse's hoofs and steel and plastic spikes on golf shoes.
- Strong and weatherproof.
- Produced environmentally friendly and inexpensive of recycled rubber granules from worn-out car tyres.
- Can be delivered with a surface layer made of virgin EPDM-rubber for the achievement of extra weather-proofment.
- The safe choice for almost every application.

Kintergartens Playgrounds Amusement Parks Schools
Fitness Rooms Gyms Terraces Roof Terraces
Garden Walkways Golf Clubs Exhibition Stands
Balconies Horse Stables Anti-fatigue Mats & Floorings

ErgoFloor PU Rubber Tiles.....for safety's sake!



Product specification

ErgoFloor PU Rubber Tiles are made of granulated recycled rubber from worn-out car tyres. The rubber granules are bonded together with a polyurethane binder.


The general product programme includes three different qualities:

- **The C1-quality** is provided with a 3-5 mm thick surface layer made of fine-grained rubber granules. The surface layer can be made in a selection of decorative colours by the use of a coloured binder. The surface has moderate weather-proofness and abrasion resistance properties.
- **The C3 EPDM quality** is provided with a 4-5 mm thick surface layer made of virgin EPDM rubber granules. The surface can be made in a selection of decorative colours and also in a mix of these. The surface has excellent weather-proofness and abrasion resistance properties
- The C1 quality can be delivered as through-dyed in the special quality **SOLID**.

The three product qualities can be delivered as rubber tiles and rubber pavers in different shapes and sizes.



Dimension tolerance ≤ 1%.
Hardness: 55-60 shore A

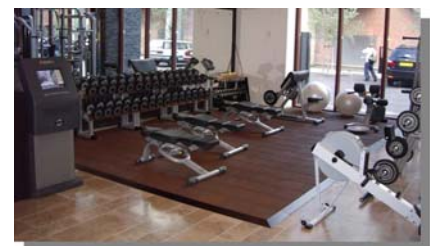

ErgoFloor PV Rubber Ltd.
 Lot LB2-04, Street No. 7, Xuyen A Industrial Zone
 My Hanh Bac Ward, Duc Hoa District, Long An Province, Viet Nam
 Ph.: +84 72 3 849415, Fax: +84 72 3 849416,
 www.ergofloorpv.com, mail@ergofloorpv.com

Distributor:



Colour Chart PU-Rubber Tiles

The colors shown are only indicative, as true colour reproduction is not possible

Basic quality, C1

Manufactured of 100% recycled rubber bonded with a coloured binder.

Standard colours: black, red, green, grey, brown, sand and blue. Delivery in special colours can be done according to agreement.



C1-black

C1-red

C1-green

C1-grey

C1-brown

C1-sand

C1-blue

EPDM-quality, C3

With a surface made of virgin EPDM rubber granules in top of a sub-layer made of recycled rubber.

Standard colours: yellow, blue, grey, red, eggshell & green and also in a mix of these + black.



C3-yellow

C3-blue

C3-grey

C3-red

C3-eggshell

C3-green

C3-mix